

Objective

High resistance raw materials to provide a weatherproof item, powder coated aluminium housing with adjustable mounting base, ground mounting, and glare shield. The light source is a highly efficient LED system, which provides high performances paying attention to consumption. The result is a stylish item with "green" character thanks to the considerable energy saving with it possible.

Obiettivo

Materie prime ad alta resistenza per fornire un articolo resistente alle intemperie, custodia in alluminio verniciato a polvere con base di montaggio regolabile, punta di montaggio a terra e schermo antiabbagliante. La sorgente luminosa è un sistema LED ad alta efficienza, che offre alte prestazioni prestando attenzione ai consumi. Il risultato è un oggetto elegante con carattere "verde" grazie al notevole risparmio energetico con esso possibile.

Description

Housing - Die cast aluminium powder coated with choice of RAL colors.

Diffuser - Tempered clear glass with optional optical glass lens.

Reflector - Polished aluminium reflector.

LED - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.



Standards - manufactured in accordance with tested as per PTPS IEC 62722

Accessories - Tree belt, spike, pole kit, wall mounted, honeycombs.

CODE	WATTAGE	LUMEN	SIZE mm
2140510	10W	1180lm	Ø82X140X176H
2140512	12W	1380lm	Ø82X140X176H
2140514	14W	1650lm	Ø108X160X216H
2140515	15W	1725lm	Ø108X160X216H
2140520	20W	2300lm	Ø108X160X216H
2140530	30W	3540lm	Ø108X160X216H
2140555	55W	6440lm	Ø169X270X277H
2140560	60W	7080lm	Ø169X270X277H



LED	EMERSON	ECO	
PHASE DIMMING	DALI	1-10 DIMMING	
65°C	Glowing Wire Test - 850°		
-20°C			
IP 66	IK 09	UGR <21	SDCM 2.0/3.0
CIDET	EAC	COMPLIANCE LM-79 TM-21 (TM-80)	
PASEL ACCREDITATION	SMD COB	CRI >90	
RoHS	SELV	F	series wiring
CE	COMPLIANCE	U	
A++		85~265V 50/60Hz	

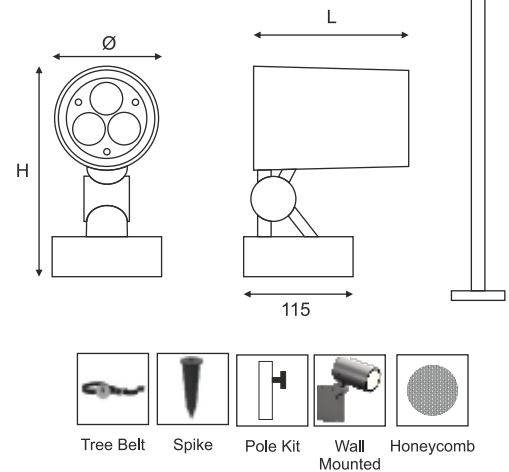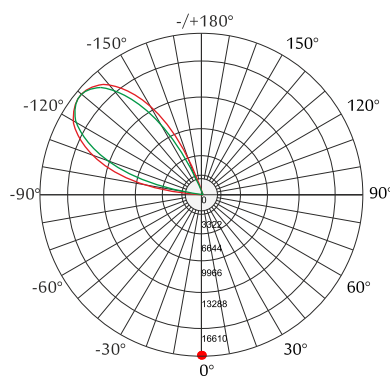

12°	24°	38°	45°	60°
2700K				
3000K				
4000K				
5000K				
6000K				
6500K				

LED Drivers - PHILIPS GTCI TRIDONIC LED Chips - BRIDGELUX CREE SHARP SAMSUNG PHILIPS CITIZEN

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at www.romaluce.it are the most recent versions and supercede all other printed or electronic versions.