

Objective

The remarkable efficacy and photometric diversity of the Nordina range enables installations to be considered at heights of up to 12 metres. The Nordina luminaire is designed for means (various types) or top mounting on the poles. With built in driver and high efficiency LED technology, this luminaire is suitable to illuminate every street and square with high lighting performances.

Obiettivo

La notevole efficacia e diversità fotometrica della gamma Nordina consente di valutare le installazioni ad altezze fino a 12 metri. L'apparecchio Nordina è progettato per il montaggio meanao (vari tipi) o superiore sui pali. Con il driver integrato e la tecnologia LED ad alta efficienza, questa luminaria è adatta per illuminare ogni strada e piazza con alte prestazioni illuminotecniche.

Description

Housing - Made of dia cast aluminum powder coated with choice of RAL colors.

Diffuser - Vandal resistant, V2 self extinguishing polycarbonate,

UV stablized with prismatic pattern diffuser specially for LED

Reflector - Anodized aluminum reflector.



LED - reducing energy consumption with L80/B10/F10 50,000 hrs lifetime.

Standards - manufactured in accordance with EN 60598-1 and 60598-2-1



| CODE | WATTAGE | LUMEN | SIZE mm |
|---------|---------|--------|--------------|
| 1333030 | 30W | 3240lm | Ø680 X 480mm |
| 1333050 | 50W | 5400lm | Ø680 X 480mm |
| 1333080 | 80W | 8640lm | Ø680 X 480mm |

| | | | |
|---------------------|------------|------------------------------|--------------|
| LED | | | |
| PHASE DIMMING | DALI | 1-10 DIMMING | ENERGY STAR |
| 65°C | | Glowing Wire Test - 850° | |
| -20°C | | | |
| IP 65 | IK 08 | UGR <22 | SDCM 2.0/3.0 |
| CIDET | EAC | COMPLIANCE LM-79 TM-21 LM-80 | |
| PASEL ACCREDITATION | SMD | CRI >90 | |
| ROHS | SELV | F | ECO |
| CE | COMPLIANCE | U | |
| A++ | | 220~265V 50/60Hz | |

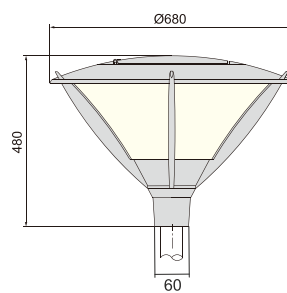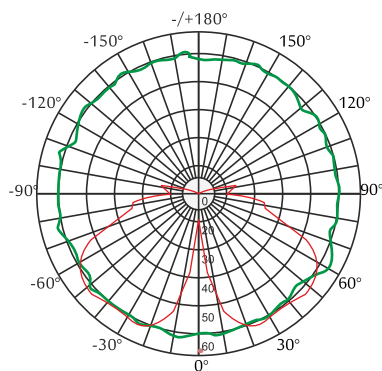

2700K
3000K
4000K
5000K
6000K
6500K

360°

LED Drivers - PHILIPS GTI MEAN WELL GTCI TRIDONIC LED Chips - BRIDGELUX CREE SHARP SAMSUNG PHILIPS CITIZEN

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at www.romaluce.it are the most recent versions and supercede all other printed or electronic versions.